

# ECO

Parking Lights.

Tech Specs: **ECO Cobra**

**Housing:**

Heavy duty die cast aluminum construction with corrosion resistant hardware. Separate hinged ballast and lamp compartment doors. 4 bolt leveling slip fitter mount. See finish note.

**Door Frame:**

Heavy duty die cast aluminum, one piece silicone gasket, seals door frame to housing. See finish note.

**Lens:**

Impact resistant borosilicate prismatic glass refractor, silicone caulked to door frame.

**Reflector:** Anodized aluminum, designed for maximum efficiency.

**Ballast:**

Philips QL induction high frequency electronic ballast 120V-277V, 50/60HZ. Contact factory for other voltages. Available Wattages: 85, 165 Watts

**Lamp:**

Philip QL Induction electrodeless fluorescent lamp with average rated life of 100,000 hours. Available Color Temps: 3000, 4000, 5000 Kelvin

**Finish:**

Silver, detergent cleaned, prime coated. Chip resistant powder urethane polyester coating, electrostatically applied and baked.

**Labels:**


ETL / CETL listed for wet location  
I.B.E.W. assembled and labeled.




# ECO COBRA



## Dimensions

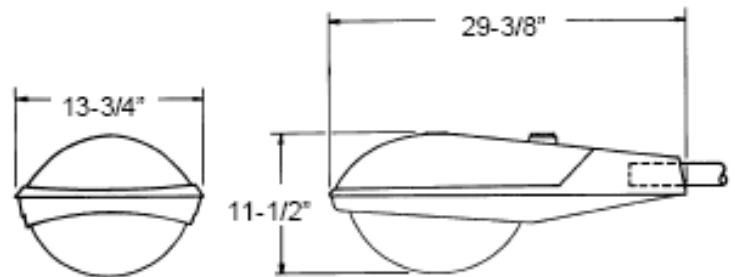

## Photometrics

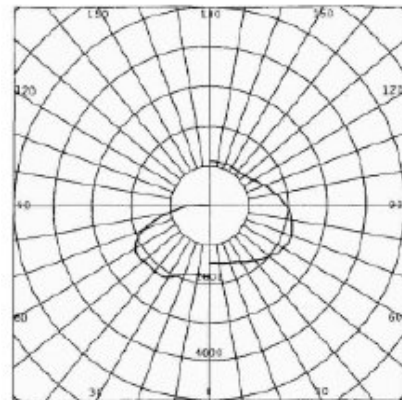

[www.ecoparkinglights.com](http://www.ecoparkinglights.com)  
CALL TOLL FREE 1-866-897-1234

Green that makes Cents.®